


Triangular Wave Technologies Patented IonGuard Ionization and Purification Systems

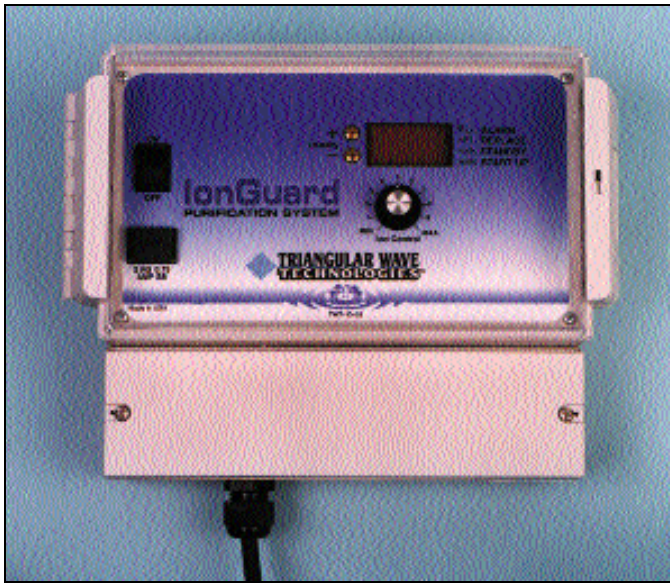

TECHNICAL DATA

TWT-5C8-277

0.5 AMP control unit (standard application) Ionization/Disinfection System for the control of Algae/Bacteria.

Height	Width	depth	Voltage	Amperage	Electrode Size
8.5"	11.5"	6.0"	120 vac	0.5	up to 6-inch

Designed for pool sizes up to 40,000 gallons


TWT-5C8-278

1.0 AMP control unit (high volume application) Ionization/Disinfection System for the control of Algae/Bacteria.

Height	Width	depth	Voltage	Amperage	Electrode Size
8.5"	11.5"	6.0"	120 vac	1.0	up to 6-inch

Designed for pool sizes up to 80,000 gallons

Treat your algae, bacteria, scaling, deposit, corrosion and oxidation problems with efficient, environmentally-friendly **Triangular Wave Technologies Chemical-Free Pool Management Systems**. Reduce your chemical treatment and maintenance efforts by 80% or more, and make your swimming experience safe, fun, and environmentally responsible.

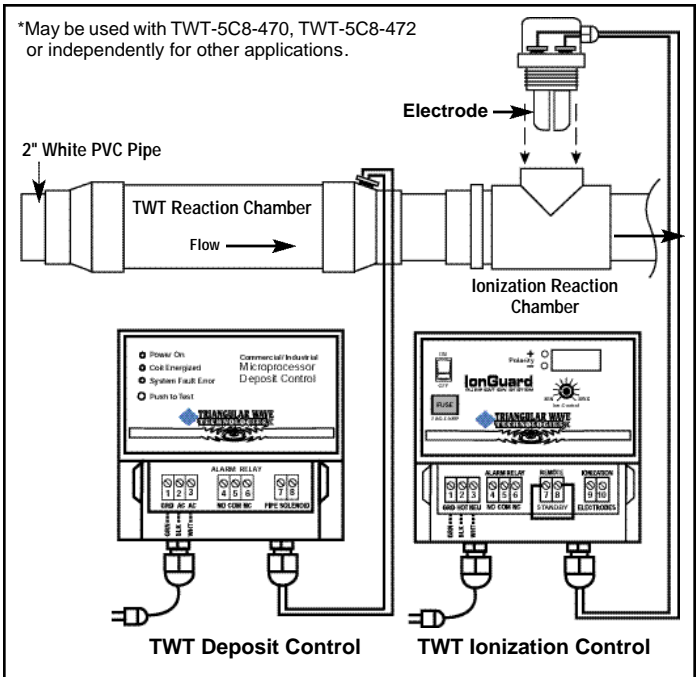

TWT Deposit Control/Ionization Purification System 2-inch Ionization Unit with Integrated* TWT-5C8-402



Triangular Wave Technologies Microprocessor Deposit Control Unit TWT-402, IonGuard Ionization Disinfection System TWT-ID-02 and a Factory Wrapped 2" Industrial PVC Reaction Chamber TWT-IRC-02

TRIANGULAR WAVE
TECHNOLOGIES, INC.
 FLUID MANAGEMENT SOLUTIONS
www.triangularwave.com